

SS DATA SHEET

SPECIFICATIONS & PERFORMANCE

Pump Cycling Rate




Surge Suppressor Advantages:

- Virtually surge-free flows
- Steadier pressures
- Less vibration and noise
- Simple installation
- Variety of sizes and materials
- Automatically self-charging and self-venting
- Longest life balanced diaphragm



Surge Suppressors

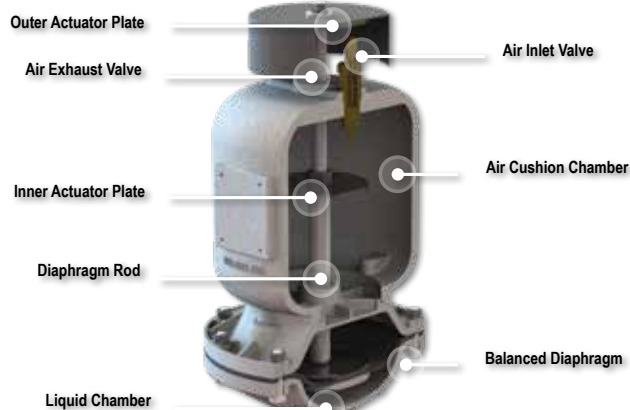

Model & Description	Max. Pressure	Air Inlet Size	Liquid Inlet Size	Dimensions inches (mm)	Available Wetted Materials					
					Chamber		Diaphragm			
					Alumi-num	Stainless Steel	Poly-propylene	Buna-N	Neo-prene w/ PTFE Overlay	Santo-prene®
VTA1 For 1" pumps. Includes 13 1/4" air hose	125 psi 8.6 bar	1/4" NPT (external thread)	1" NPT	13 5/8"-15 1/8" H (346mm-384mm) 9" diameter (229mm) NPT(F)	✓	✓		✓	✓	✓
VTA25 For 1" pumps. Includes 13 1/4" air hose	125 psi 8.6 bar	1/4" NPT (external thread)	1" BSP (Tapered int. thread)	13 5/8"-15 1/8" H (346mm-384mm) 9" diameter (229mm) NPT(F)	✓	✓		✓	✓	✓
VTA1 1/2 For 1" & 1 1/2" pumps. Includes 11 1/4" air hose	125 psi 8.6 bar	1/4" NPT (external thread)	1 1/2" NPT (int. thread)	19 7/8"-21 3/8" H (505mm-543mm) 10 1/2" diameter (267mm) NPT(F)	✓	✓		✓	✓	✓
VTA40 For 1" & 1 1/2" pumps. Includes 11 1/4" air hose	125 psi 8.6 bar	1/4" NPT (external thread)	1 1/2" BSP (Tapered int. thread)	19 7/8"-21 3/8" H (505mm-543mm) 10 1/2" diameter (267mm) NPT(F)	✓	✓		✓	✓	✓
VTA2 DL2 For 1 1/2" & 2" pumps. Includes 13 1/4" air hose	125 psi 8.6 bar	1/4" NPT (external thread)	2" NPT (int. thread)	20 1/4"-23 3/16" H (514mm-589mm) 12 1/2" diameter (317mm) NPT(F)	✓	✓		✓	✓	✓
VTA50 DL2 For 1 1/2" & 2" pumps. Includes 13 1/4" air hose	125 psi 8.6 bar	1/4" NPT	2" BSP (Tapered int. thread)	20 1/4"-23 3/16" H (514mm-589mm) 12 1/2" diameter (317mm) NPT(F)	✓	✓		✓	✓	✓
VTA3 DL2 For 3" pumps. Includes 13 1/4" air hose	125 psi 8.6 bar	1/4" NPT	3" 150# ANSI flange or 3" NPT int.	20 1/8"-23 1/8" height (511mm-587mm) 16 3/16" diameter (411mm) NPT(F)	✓	✓		✓	✓	✓
VTA80 DL2 For 3" pumps. Includes 13 1/4" air hose	125 psi 8.6 bar	1/4" NPT	3" BSP (Tapered int.) or 80mm DIN Flange	20 1/8"-23 1/8" H (511mm-587mm) 16 3/16" diameter (411mm) NPT(F)	✓	✓		✓	✓	✓
VDA05	125 psi 8.6 bar	1/4" NPT	1/2" NPT	7 15/32" H (190mm) 5 5/8" W (143mm) 6 15/16" D (176mm)	✓	✓	✓		✓	
VDA07	125 psi 8.6 bar	1/4" NPT	3/4" NPT	7 23/32" H (196mm) 5 5/8" W (143mm) 6 15/16" D (176mm)			✓		✓	
VDA10	125 psi 8.6 bar	1/4" NPT	1" NPT	11 23/32" H (298mm) 5 5/8" W (143mm) 7 1/2" D (191mm)			✓		✓	

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Казахстан (772)734-952-31

Пермь (342)205-81-47
Россия (495)268-04-70
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93